


Välisseinapaneel / Exterior wall panel / +50KPK

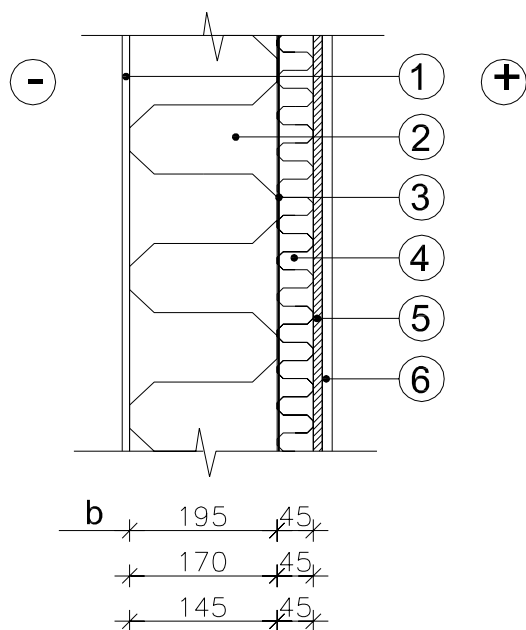

Kirjeldus / Description

- 1 Kipskartongplaat 9,5 mm
- 2 Puitkarkass 45xb mm (mineraalvill b+5 mm)
- 3 PE-kile 0,2 mm
- 4 Puitkarkass 45x45 mm (mineraalvill 50 mm)
- 5 Puitlaastplaat 12 mm
- 6 Kipskartongplaat 12,5 mm / 15 mm

- 1 Gypsum board 9,5 mm
- 2 Timber frame 45xb mm (min.wool b+5 mm)
- 3 PE-folio 0,2 mm
- 4 Timber frame 45x45 mm (min.wool 50 mm)
- 5 Chipboard 12 mm
- 6 Gypsum board 12,5 mm / 15 mm

- 1 Gipskartonplatte 9,5 mm
- 2 Holzstränder 45xb mm (min.faser b+5 mm)
- 3 PE-folio 0,2 mm
- 4 Holzstränder 45x45 mm (min.faser 50 mm)
- 5 Spanplatte 12 mm
- 6 Gipskartonplatte 12,5 mm / 15 mm

	Tüübi tähis /Type	$\lambda_D=0,037W/m^*K$	Kaal	Maht
		$U = W/m^*K$	kg/m ²	m ³ /m ²
1	VS-195+50KPK	0,17	50	0,28
2	VS-170+50KPK	0,19	47	0.26
3	VS-145+50KPK	0,22	45	0.23