


# Välisseinapaneel / Exterior wall panel / KPK

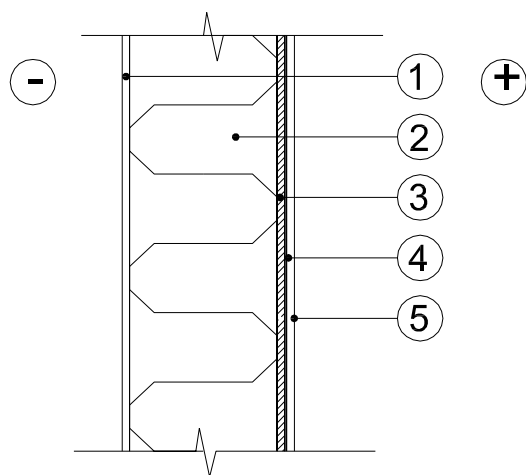

<b>b</b>	195
	170
	145
	120
	95

## Kirjeldus / Description

- 1 Kipskartongplaat 9,5 mm
- 2 Puitkarkass 45xb mm (mineraalvill b+5 mm)
- 3 Puitlaastplaat 12mm
- 4 PE-kile 0,2 mm
- 5 Kipskartongplaat 12,5 mm /15 mm

- 1 Gypsum board 9,5 mm
- 2 Timber frame 45xb mm (min.wool b+5 mm)
- 3 Chipboard 12 mm
- 4 PE-folio 0,2 mm
- 5 Gypsum board 12,5 mm /15 mm

- 1 Gipskartonplatte 9,5 mm
- 2 Holzstränder 45xb mm (min.faser b+5 mm)
- 3 Spanplatte 12 mm
- 4 PE-folio 0,2 mm
- 5 Gipskartonplatte 12,5 mm /15 mm

	Tüübi tähis /Type	$\lambda_D=0,037W/m^*K$	Kaal	Maht
		$U = W/m^*K$	kg/m <sup>2</sup>	m <sup>3</sup> /m <sup>2</sup>
1	VS-195 KPK	0,22	45	0.23
2	VS-170 KPK	0,25	42	0,21
3	VS-145 KPK	0,29	40	0,18
4	VS-120 KPK	0,34	38	0,16
5	VS-95 KPK	0,42	36	0,13